


## Channel reducing strips and filler strips




### Application

To hold panels which are 6 mm thickness. They can also be inverted to blank off the slots on triple channel extrusions.

### Specification

Grey PVC for panels of 6 mm in thickness  
Panel insertion depth: 11 mm

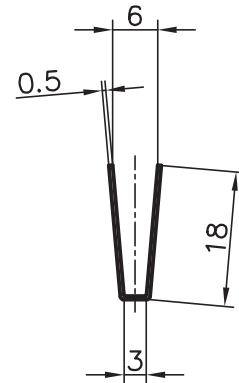

### Application

When fitting 3mm panels for base 40 panels extrusions.

### Specification

Black PVC

Order data	Order number
------------	--------------

<b>Channel reducing strip</b>	<b>extrusions 50</b>
A = 14.5 mm	
Standard length 5000 mm	A39-50-00/5000
Cut to length	A39-50-02-02/...

<b>Channel reducing strip</b>	<b>extrusions 45 / 40*</b>
A = 10 mm	
Standard length 5000 mm	C39-50-00/5000
Cut to length	C39-50-02-02/...

<b>Channel reducing strip</b>	<b>extrusions 30</b>
A = 6.5 mm	
Standard length 5000 mm	B39-50-00/5000
Cut to length	B39-50-02-02/...

<b>Channel reducing strip</b>	<b>extrusions B05-1</b>
A = 12 mm	
Standard length 5000 mm	B39-55-00/5000
Cut to length	B39-55-02-02/...

\* with 45 mm basis not available as filler strips



Order data	Order number
------------	--------------

<b>Channel reducing strip</b>	<b>Base 40</b>
Standard length 5000 mm	C39-63-00/5000
Cut to length	C39-63-02-02/...